


- NOTES
1. WIRING LEGEND:  
 DISTANT TERMINATING AREA  
 DISTANT TERMINATING DESIGNATION  
 WIRE COLOR CODE  
 AM-2-S
  2. REFER TO 5531WD FOR SCHEMATIC
  3. ALL WIRE 18 GA UNLESS OTHERWISE SPECIFIED.
  4. CONNECTIONS VIEWED FROM SOLDER TERMINAL SIDE.
  5. USE SLEEVING TO INSULATE WHERE NECESSARY.
  6. ( ) INDICATES TERMINAL DESIGNATIONS FOR REFERENCE ONLY.
- FUSE VALUES:
- |       |       |
|-------|-------|
| XF900 | 1.6 A |
| XF901 | 1.6 A |
| XF902 | 1 A   |
| XF903 | 3A    |
| XF904 | 6A    |
| XF905 | 1A    |
| XF906 | 2A    |
| XF907 | 1A    |
- COLOR CODE
- |            |            |
|------------|------------|
| BLACK - BK | BLUE - BL  |
| BROWN - BR | WHITE - W  |
| RED - R    | SLATE - S  |
| ORANGE - O | PURPLE - P |
| YELLOW - Y |            |
| GREEN - G  |            |

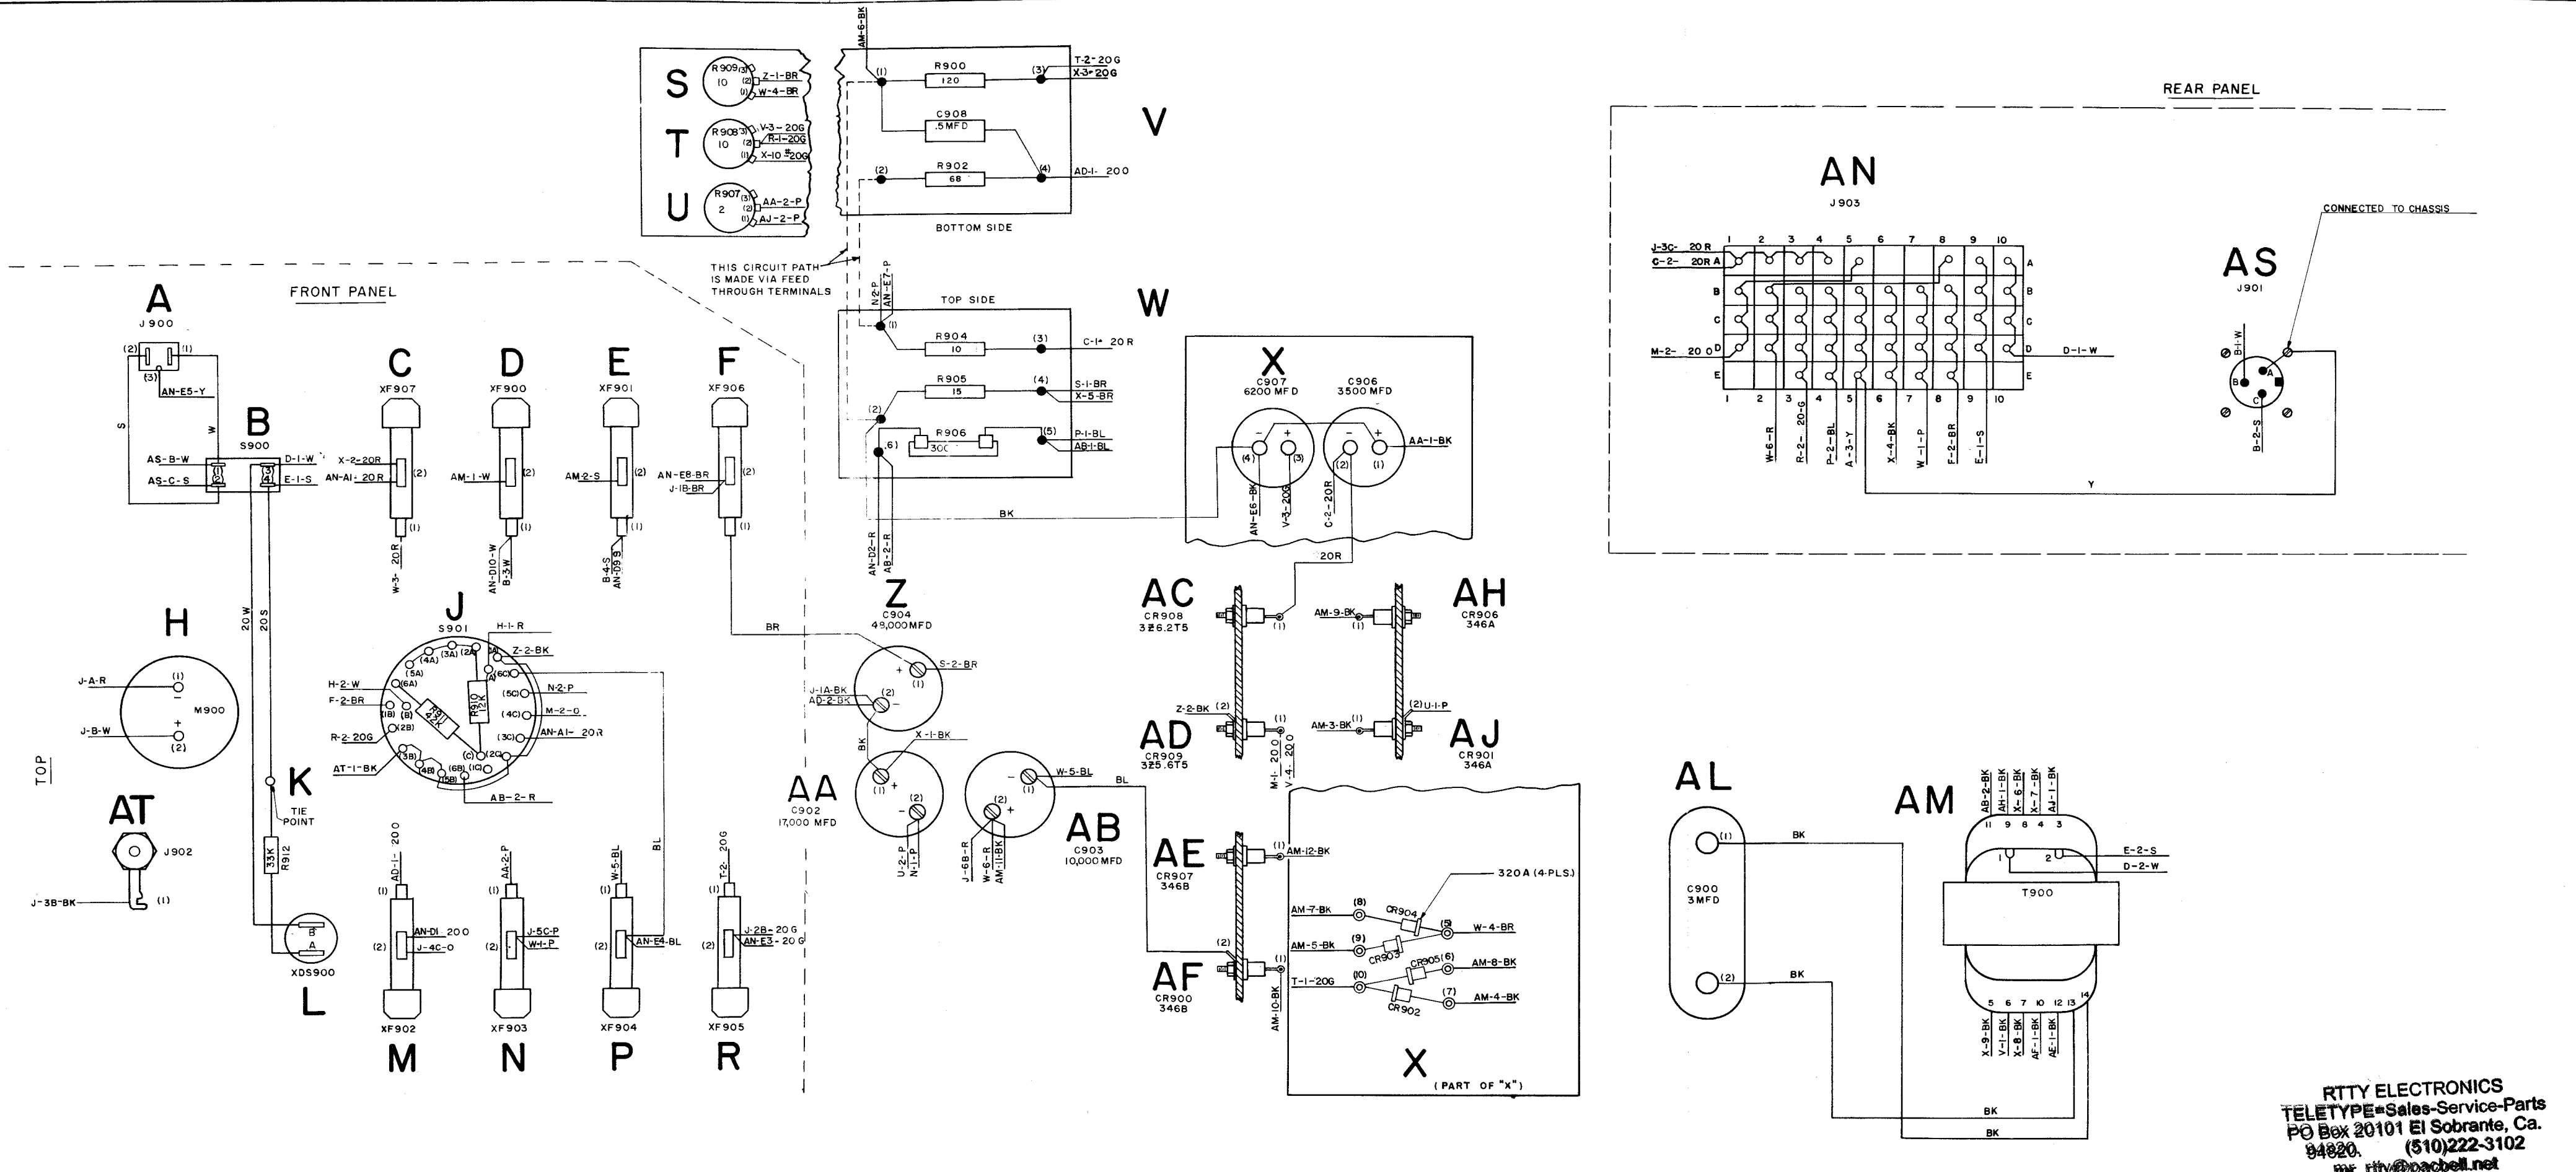

RTTY ELECTRONICS  
 TELETYPE Sales-Service-Parts  
 PO Box 20101 El Sobrante, Ca.  
 94820 (510)222-3102  
 rty@pacbell.net

ACTUAL WIRING  
 DIAGRAM  
 FOR  
 MULTI-VOLTAGE  
 RECTIFIER  
 M.V.P.S. 2  
 ASSEMBLY NO.  
 177149  
 APPROVALS  
 DATE: 8-26-61  
 RD. FILE NO 24-A2513445  
 DRAWN BY CHD  
 ENGR. APPC  
 TELETYPE  
 CORPORATION  
 5532 WD