


NOTICE: WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A SPECIFICALLY RELATED GOVERNMENT PROCUREMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY HEREBY DISCLAIMS ANY LIABILITY FOR ANY OBLIGATION WHATSOEVER AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OF ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSIONS TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE DELAYED THEREBY.

THIS DOCUMENT HAS BEEN PURCHASED BY THE GOVERNMENT AND MAY BE REPRODUCED AND USED IN CONNECTION WITH ANY GOVERNMENT PROCUREMENT OR SALES/LEASE OPERATION.

*FOR INFORMATION ONLY. CONTRACTOR MAY AT HIS OPTION DEVIATE FROM THESE PROCESS DETAILS.

REVISIONS				
SYM	DESCRIPTION	DATE	APPROVAL	
SYM	PR10042-B			
A ₄	A ₁ RENUMBERED NOTES A ₂ COMP SN60 WAS SN-50 IN NOTE 1 A ₃ DELETED VARNISH NOTE A ₄ ITEM 6 WAS VARNISH	27 OCT 59	42428-PC 59-AI-51	REV'D PME
B ₁	B ₁ SWE NO'S WERE COLLINS PART NO.	24 DEC 59	42428-PC 59-AI-51	REV'D PME
C ₁	A) ADD DESIGNATION	19 MAR 1965	21582-PC	REV'D PME

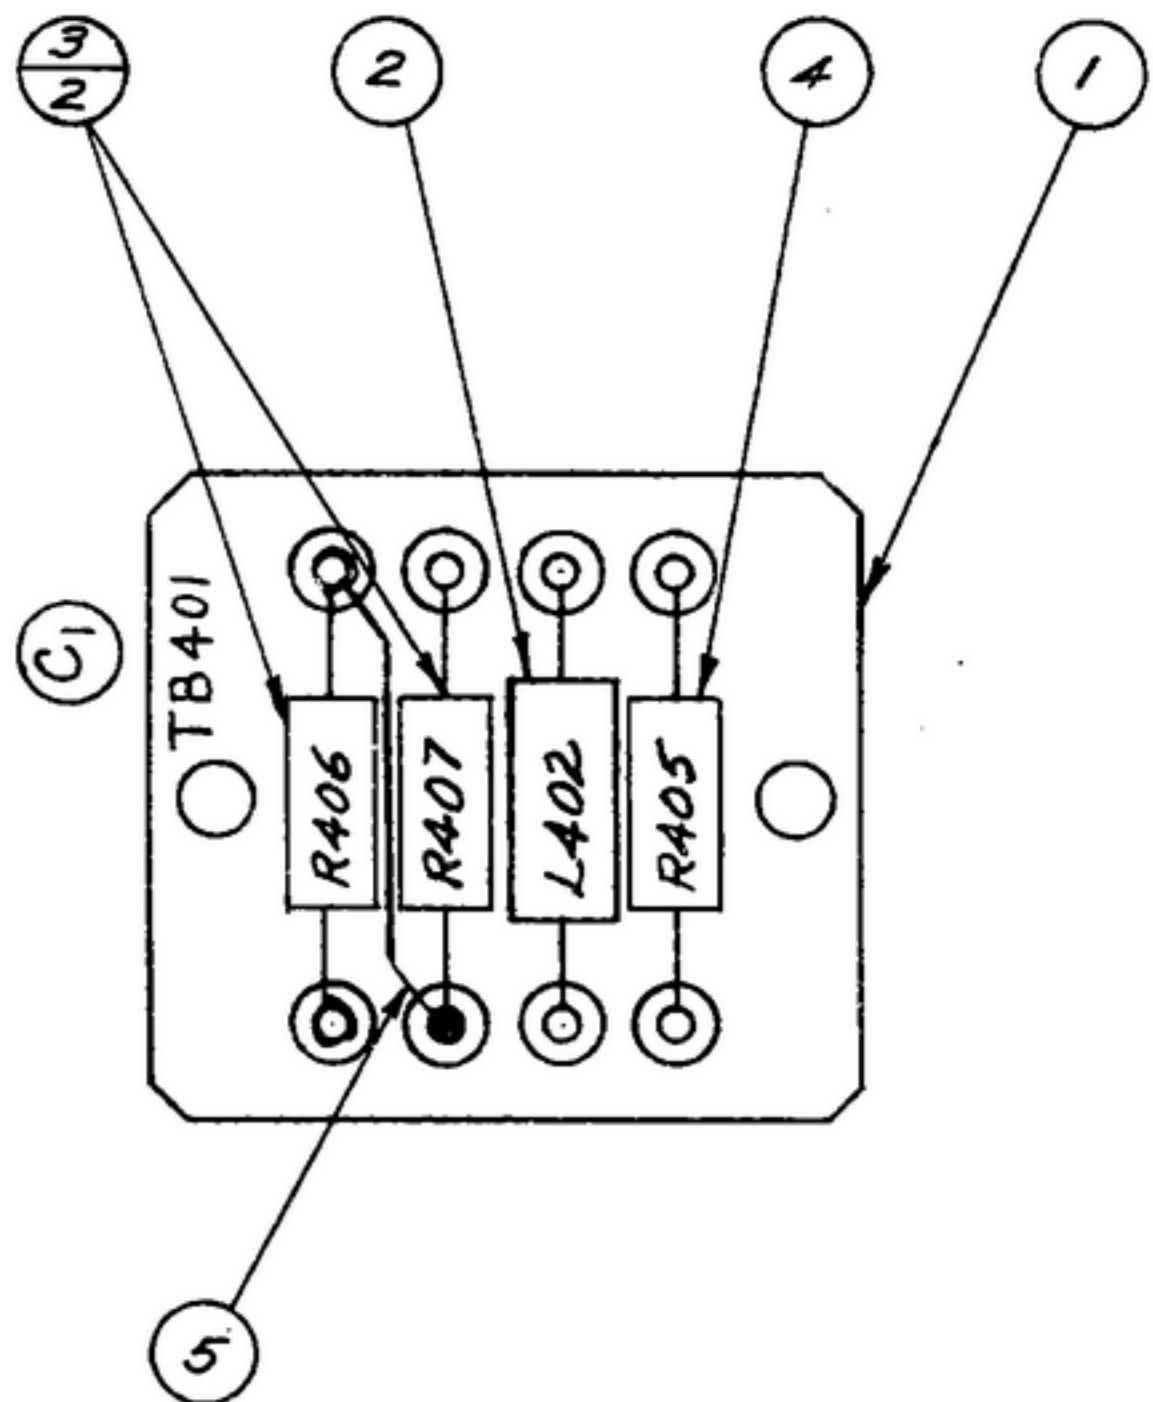

NOTES:

- ALL CONNECTIONS INDICATED * TO BE SOLDERED PER MIL-5-6872. USING ROSIN CORE SOLDER COMP SN-60 PER SPEC QQ-5-571. CONNECTIONS - TO BE MECHANICAL. (SOLDER LATER)
- WIRE TO BE TYPE 5, #22 DRAWN & ANNEALED, TIN COATED.
- IN ALL SPLIT BALLOONS TOP FIGURE IS MATERIAL LIST ITEM INDICATOR AND BOTTOM FIGURE IS QUANTITY.

SWE PART NO.	ITEM	REQD	PART NO.	DESCRIPTION	MATL	MATL SPEC	NOTE
105130317-7	6	AS REQD		SOLDER SOFT		QQ-5-571	
305110668-39	5	AS REQD	SM-B-249023-1	WIRE		MIL-W-3861	4
	4	1	RC20GF333K	RESISTOR		MIL-R-11	
	3	2	RC20GF392K	RESISTOR		MIL-R-11	
	2	1	SM-C-249217	CHOKE-RF			
	1	1	SM-B-249021	BOARD ASSY-TERMINAL			

LIST OF MATERIAL COLLINS PART NO. ~~558-0373-002~~

DRAWN <i>R.R.B.</i>				CHECKED <i>llm</i>		APPROVED		COLLINS-RADIO-CO. -CEDAR-RAPIDS, IOWA 14214-PH-51-93		DEPARTMENT OF THE ARMY SIGNAL CORPS ENGINEERING LABORATORIES FORT MONMOUTH NEW JERSEY			
UNLESS OTHERWISE SPECIFIED: DECIMAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±.008 FRACTIONAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±1/64 MACHINED ANGLES MAY VARY ±.1° SHEARED ANGLES MAY VARY ±.25° BROKEN ANGLES MAY VARY ±1° ECCENTRICITY BETWEEN ANY DIAMETERS ON THE SAME CENTERLINE SHALL NOT EXCEED .010 TOTAL INDICATOR READING. ALL DIMENSIONS ARE FINISH DIMENSIONS INCLUDING APPLIED FINISH AND ARE GIVEN IN INCHES.				SIGNAL CORPS		REVIEWED <i>PME</i>		BOARD ASSY-RESISTOR				SM-B-249023	
558-0396-004 - 1 SM-D-249007 SCDL-248775				APPROVED <i>HLY</i>		APPROVED <i>PME</i>							
APPLICATION				DATE 8 FEB '56		SCALE 2/1							