


NOTICE: WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE WRITER STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY FOR ANY OBLIGATION WHATSOEVER, AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO REPRODUCE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

THIS DOCUMENT HAS BEEN PURCHASED BY THE GOVERNMENT AND MAY BE REPRODUCED AND USED IN CONNECTION WITH ANY GOVERNMENT PROCUREMENT OR MAINTENANCE OPERATION.

* FOR INFORMATION ONLY. CONTRACTOR MAY AT HIS OPTION DEVIATE FROM THESE PROCESS DETAILS.

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A2	(1) 1/16 WAS 1/8 2 PLACES; (2) REMOVED "A", ADDED PARENS & NOTE	19 MAR 1965	21502-PC-61 REV'D PME

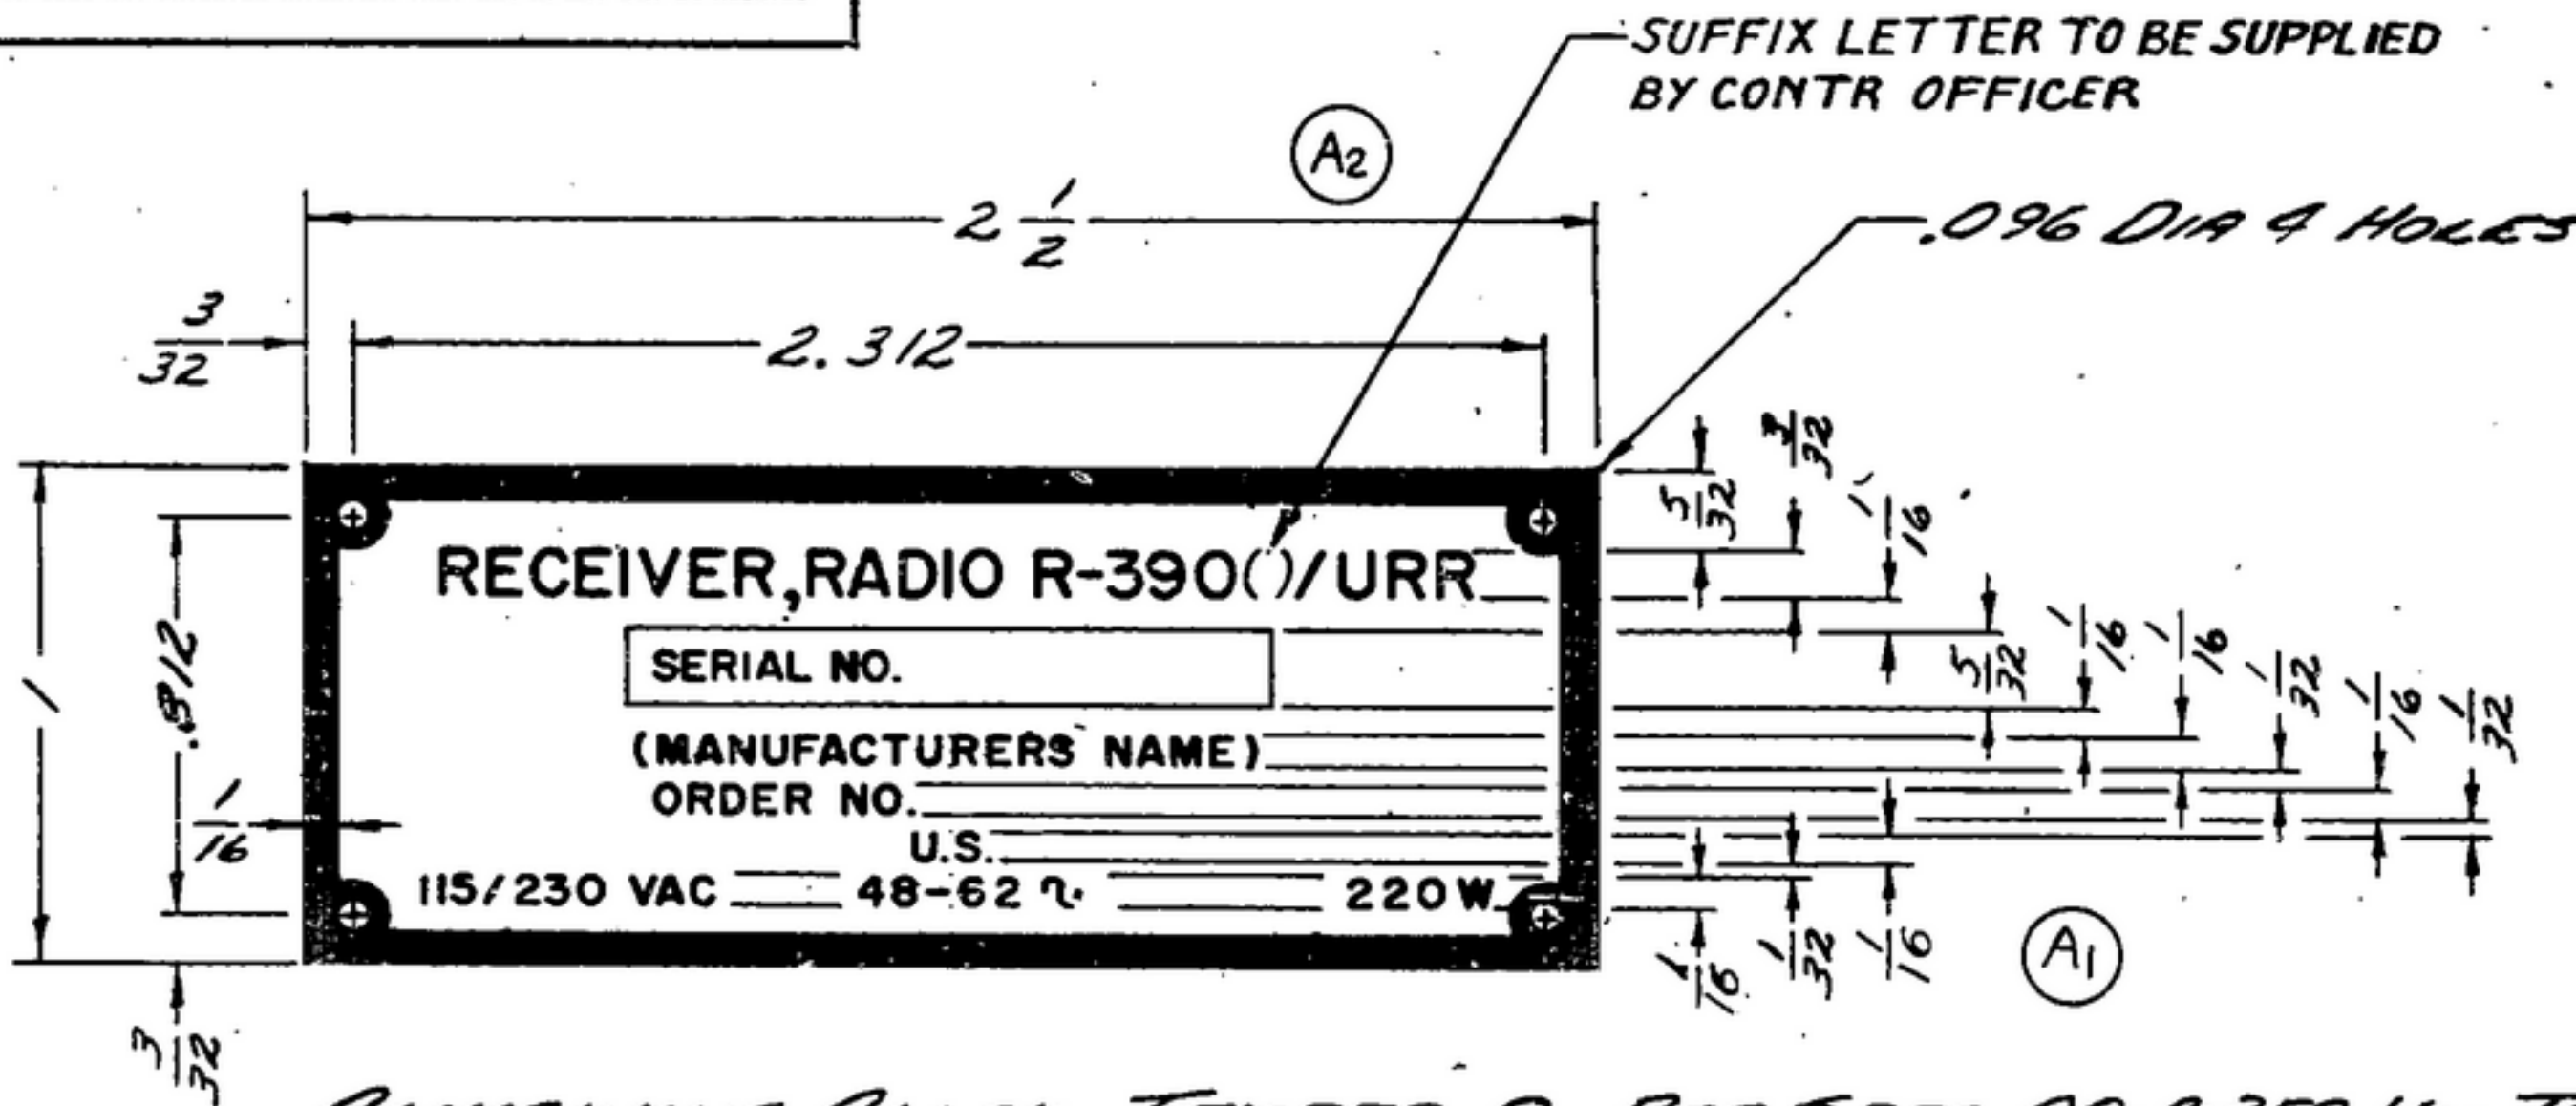

ALUMINUM ALLOY, TEMPER 0, PER SPEC QQ-A-359, 1/32 THICK.

NOTES:

1. MARKINGS SHALL MEET THE REQUIREMENTS OF SPEC MIL-M-13231.
2. MARKINGS & BORDER: NATURAL POLISHED OR WHITE.
3. BACKGROUND: DULL BLACK.
4. IDENTIFICATION PLATE SHALL BE COATED WITH A MOISTURE PROOF AND FUNGICIDAL VARNISH, TAPEI, PER SPEC MIL-V-173, OR EQUAL.
5. CHARACTERS NOT LOCATED BY DIMENSIONS SHALL BE LOCATED SYMMETRICALLY.
6. * PROOF MUST BE SUBMITTED TO PRIME CONTRACTOR FOR APPROVAL.

COLLINS PART NO.	ITEM	QTY	PART NO.	DESCRIPTION	MATL	MATL SPEC
LIST OF MATERIAL						
-COLLINS PART NO. <i>558-0001-004</i>						

DRAWN <i>L BRIGGS</i>				CHECKED <i>EG</i>		APPROVED		COLLINS-RADIO CO. CEDAR RAPIDS, IOWA <i>14214-PH-51-93</i>		DEPARTMENT OF THE ARMY SIGNAL CORPS ENGINEERING LABORATORIES FORT MONMOUTH NEW JERSEY <i>5M-B-283245</i>	
UNLESS OTHERWISE SPECIFIED: DECIMAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±.008 FRACTIONAL DIMENSIONS INCLUDING HOLE SIZES MAY VARY ±1/64 MACHINED ANGLES MAY VARY ±1° SHEARED ANGLES MAY VARY ±25° BROKEN ANGLES MAY VARY ±1° ECCENTRICITY BETWEEN ANY DIAMETERS ON THE SAME CENTERLINE SHALL NOT EXCEED .010 TOTAL INDICATOR READING. ALL DIMENSIONS ARE FINISH DIMENSIONS INCLUDING APPLIED FINISH AND ARE GIVEN IN INCHES.								SIGNAL CORPS			
								REVIEWED <i>PME</i>			
								APPROVED <i>HLV</i> <i>PME</i>			
APPLICATION				DATE <i>18 MAR 58</i>		SCALE <i>2/1</i>					

WHEN REFERRING TO THIS DRAWING STATE DRAWING NO., APPLICABLE ISSUE SYMBOL, IF ANY, AND DATE