



TONGUE & GROOVE  
4 SIDES AS SHOWN

NOTE: CHAIN AND ITS FASTENING TO BE RECESSED IN SIDES OF CASE & COVER AS SHOWN - CHAIN MUST CONFORM SWING OF COVER TO 120° MAX

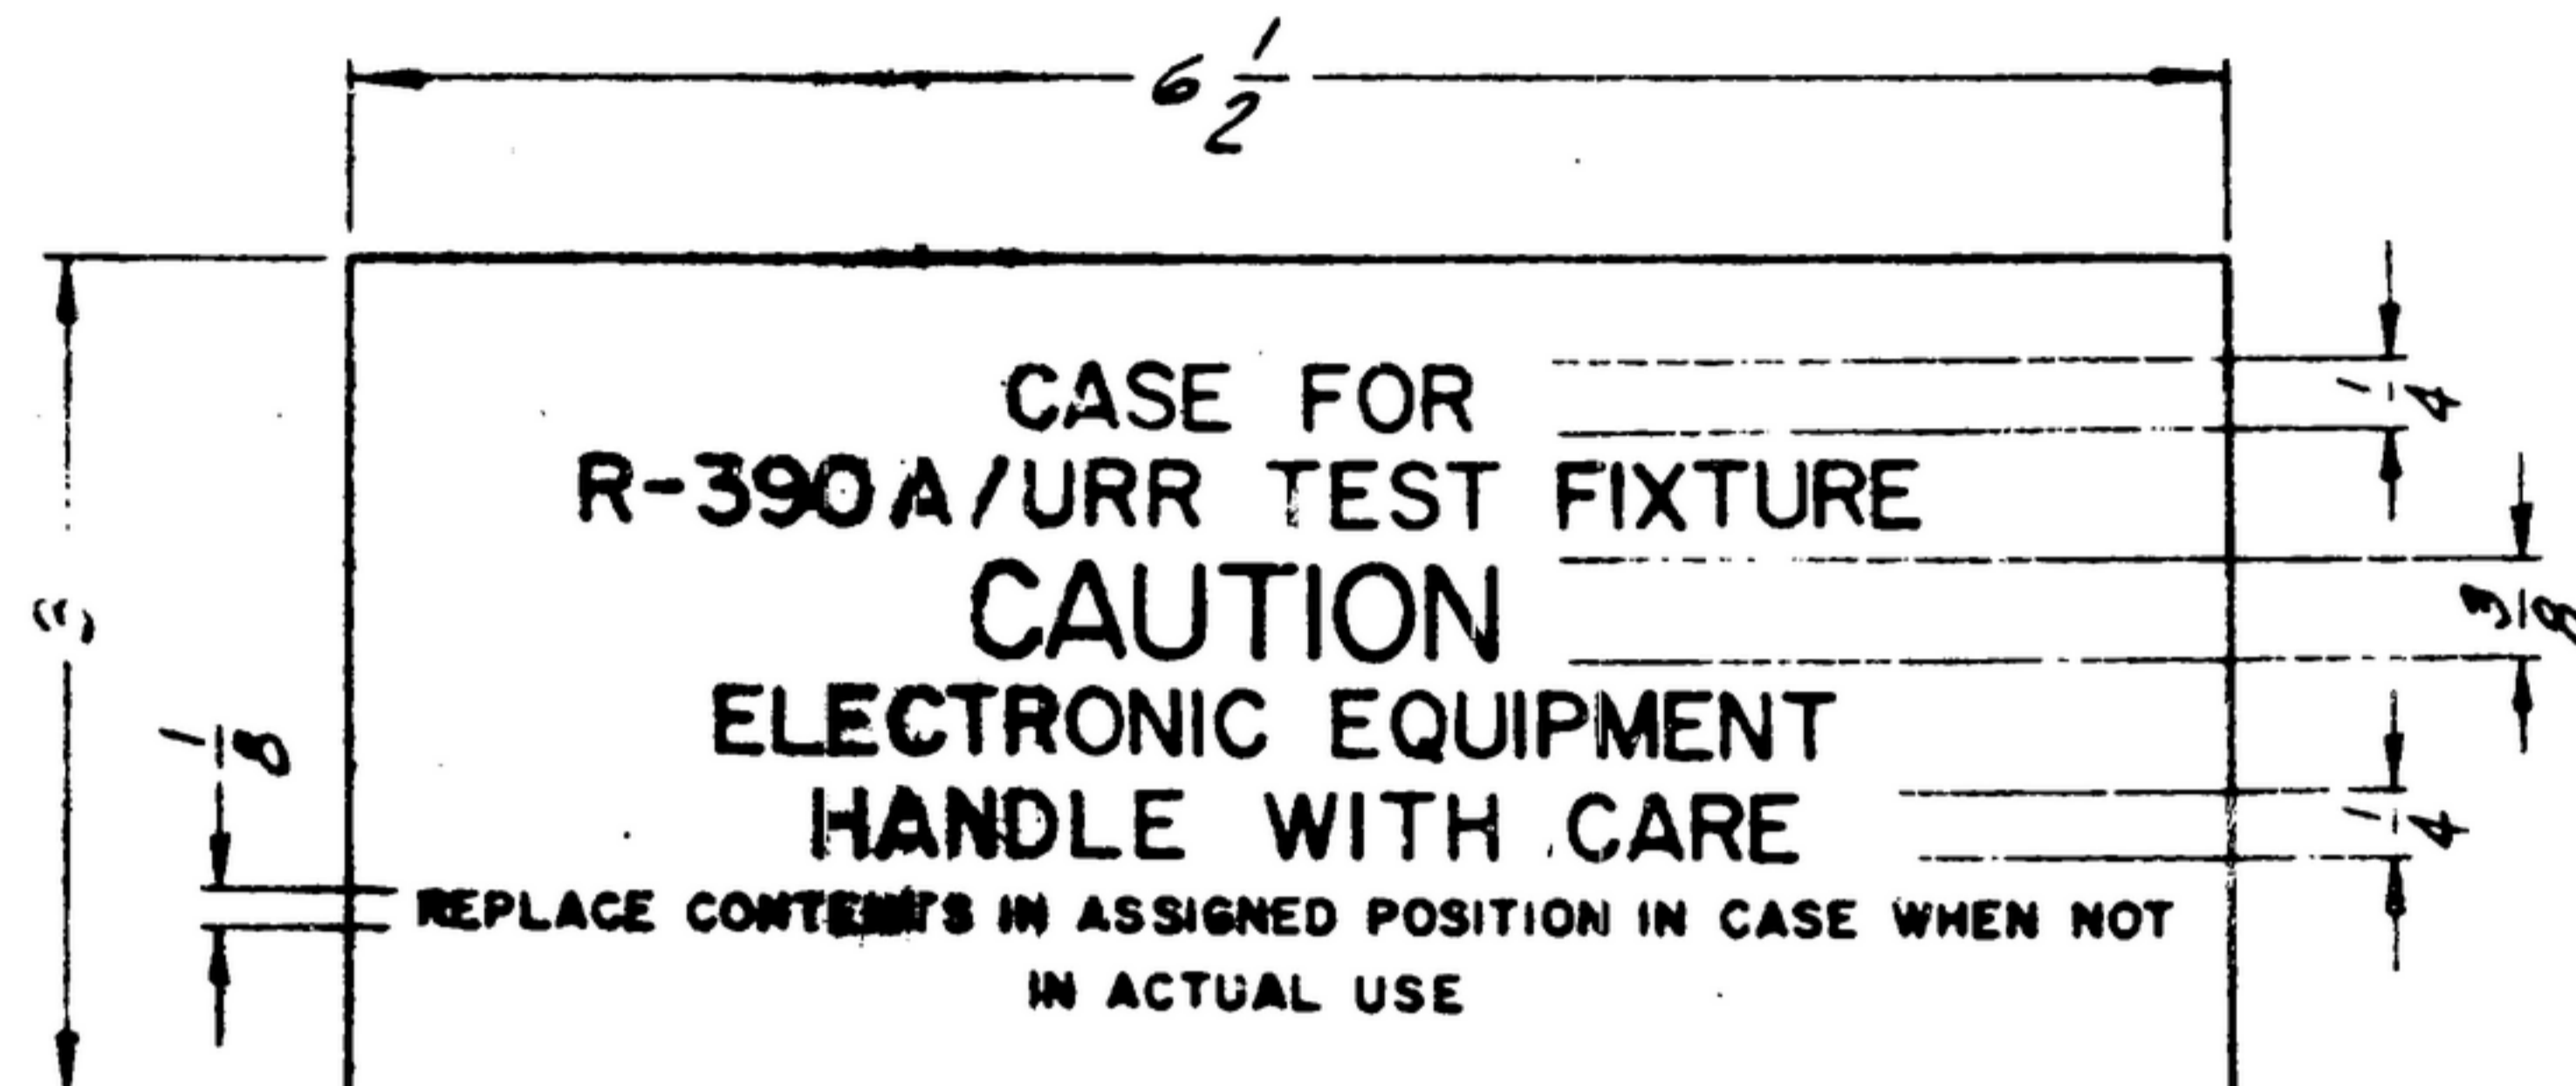

DET. #16  
SCALE: 1:1  
(SEE NOTE #5)

FASTEN TO COVER

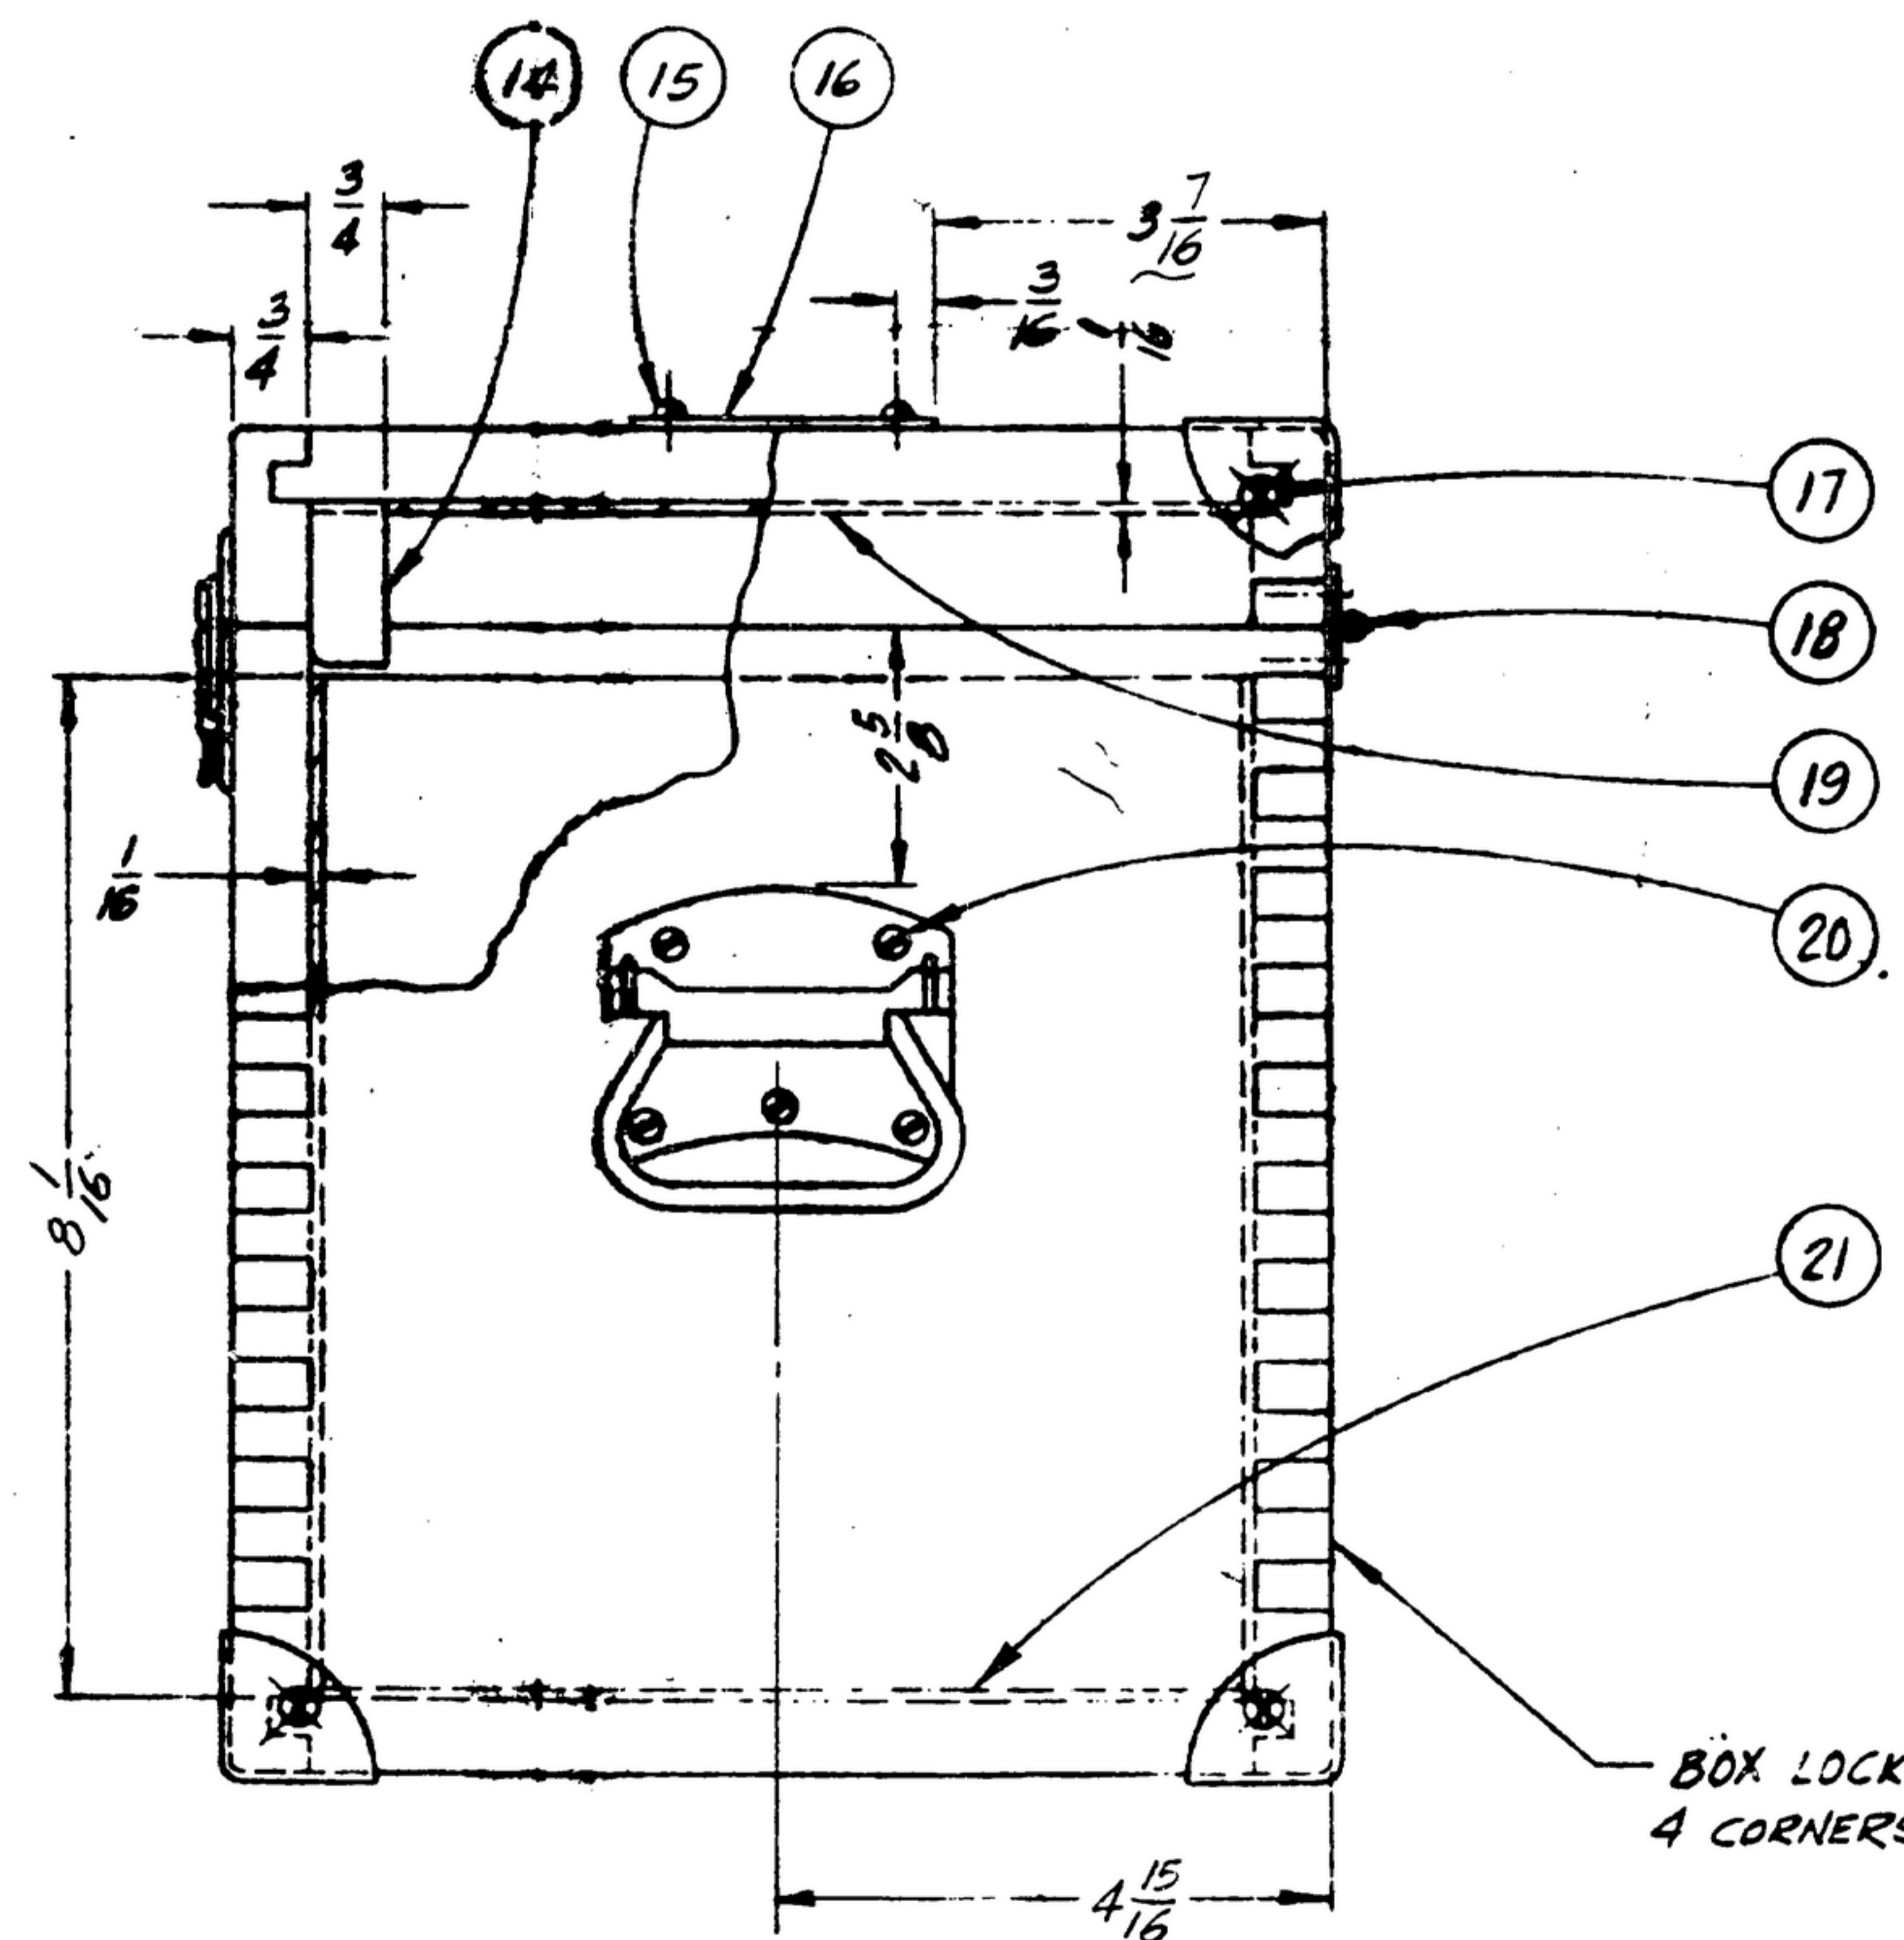

ON UNDERSIDE OF COVER USING 1/2" GOTHIC CHARACTERS MARK POWER SUPPLY #58789 (SEE NOTE #12)

ON FRONT OF CASE USING 1/2" GOTHIC CHARACTERS MARK: CASE NO #58784 (SEE NOTE #12)

- NOTES:
- HIGH DENSITY PLYWOOD PER SC-A-4774-3.
  - HARD WOOD, CLEAR, PER SC-A-4774-21.
  - ALL JOINTS SHALL BE SECURELY BONDED WITH ADHESIVE PER SPEC. MIL-A-397, TYPE I, CLASS 1, APPLIED PER SPEC. MIL-A-5433.
  - BEFORE ASSEMBLY OF HARDWARE, PADDING, & NAMEPLATE, ALL INSIDE & OUTSIDE SURFACES OF CASE SHALL BE FINISHED AS FOLLOWS: SAND AND APPLY ONE COAT OF WOOD SEALER PER SPEC MIL-S-13918 AND ONE COAT OF CLEAR SPAR VARNISH PER SPEC TT-V-119.
  - ALUMINUM ALLOY 245-T4 PER SPEC QQ-A-342. BLACK ANODIZE PER SPEC MIL-A-8625. ENGRAVE USING GOTHIC STYLE CHARACTERS AND FILL WITH WHITE PAINT.
  - CORBIN CABINET LOCK DIV.; CAT. NO. 1728 3/4 BRIGHT NICKEL FINISH.
  - STANLEY HARDWARE CO. - CAT. NO. #1205, SIZE 3 1/4, BRIGHT NICKEL FINISH.
  - STANLEY HARDWARE CO. - CAT. NO. #311 - 1 1/4 WIDE - BRIGHT NICKEL FINISH.
  - J. H. SESSIONS & SON ARMED FORCES HARDWARE CAT. NO. S-966-4A-ZNS FINISH PER SPEC. 72-53 TABLE #2 TYPE I (ZINC COATING .0005 THICK).
  - FELT PER SPEC. C-F-204, SECURELY BONDED IN PLACE WITH FLOROND #30 AS MADE BY GOODYEAR TIRE & RUBBER CO. - AKRON OHIO. (OR APPROVED EQUIVALENT).
  - CASE AND MARKINGS ON THE CASE SHALL MEET THE REQUIREMENTS OF SPEC. MIL-G-13451.
  - AFTER FINISH IS APPLIED, FILL CHARACTERS WITH WHITE PAINT - THEN APPLY ONE COAT OF COLORLESS VARNISH TYPE II PER SPEC. MIL-M-173. CHARACTERS SHALL MEET THE REQUIREMENTS OF SPEC. MIL-M-13231.
  - FINISHES ARE PER SPEC. MIL-F-14072.
  - ALL INSIDE DIMENSIONS ARE TO WOOD SURFACES.

QTY	PART NO.	DESCRIPTION	MATERIAL	FINISHES	SIZE	NOTE
21	1	-21 PAD	FELT		1/2 X 9/8 X 1/2	10
20	10	-20 FLAT HD. WOODSCR	STEEL		48 X 3/16	45
19	2	-19 PAD	FELT		1/2 X 13 X 3/8	10
18	1	-18 CONTINUOUS HINGE	STEEL		1 1/2 WIDE X 1 1/2	8
17	24	-17 FLAT HD. WOODSCR	STEEL		1/2 X 1/2 LG.	42
16	1	-16 NAME PLATE	ALUMINUM		3/4 X 3 X 6 1/2	5
15	4	-15 ROUND HD WOODSCREW	STEEL		1/2 X 1/2 LG.	4
14	2	-14 COVER ALIGNMENT BLOCK	HARDWOOD		3/4 X 3/4 X 1 1/2	2
13	12	-13 FLAT HD. WOODSCREW	STEEL		1/2 X 1/2 LG.	4
12	1	-12 CHAIN TO SUIT	ST. CAD. PL.	AS REQD		4
11	2	-11 ROUND HD WOODSCR.	STEEL		TO SUIT	4
10	2	-10 SIDES CASE	PLYWOOD		3/4 X 19 1/2 X 9 7/8	1
9	2	-9 SIDES COVER	PLYWOOD		3/4 X 21 9/16	1
8	12	-8 FLAT HD WOODSCR.	STEEL		1/2 X 5/16 LG.	4
7	1	-7 PAD	FELT		1/2 X 8 1/2 X 3 1/4	10
6	2	-6 CASE CATCH	STEEL		1/2	6
5	8	-5 BOX CORNER	STEEL		1/2	9
4	2	-4 ENDS COVER	PLYWOOD		3/4 X 8 1/2 X 3/8	1
3	2	-3 ENDS CASE	PLYWOOD		3/4 X 7 1/2 X 3/8	1
2	2	-2 CHEST HANDLE	STEEL		#3 1/2	7
1	2	SM-D-58784-1 TCP & BOTTOM	PLYWOOD		3/4 X 9 1/2 X 3 1/4	1

UNLESS OTHERWISE SPECIFIED		COSMOS INDUSTRIES, INC.	
DIMENSIONS ARE IN INCHES		DRAWING NO. 15378-PP-63	
TOLERANCES ON FRACTIONS DECIMALS ANGLES		SIGNAL CORPS	
+ 1/32 + * *		DRAWN N. FORMAS	
SC-61-57655		DATE 4-11-63	
NEXT AMY		CHECKED	
USED ON		APPROVED	
APPLICATION		DATE 9 SEPT 1958	
		SCALE HALF	

CASE FOR TEST FIXTURE R 390A/URR		DEPARTMENT OF THE ARMY SIGNAL CORPS ENGINEERING LABORATORY	
		FORT MONROE NEW MEXICO	
		SM-D-58784	